






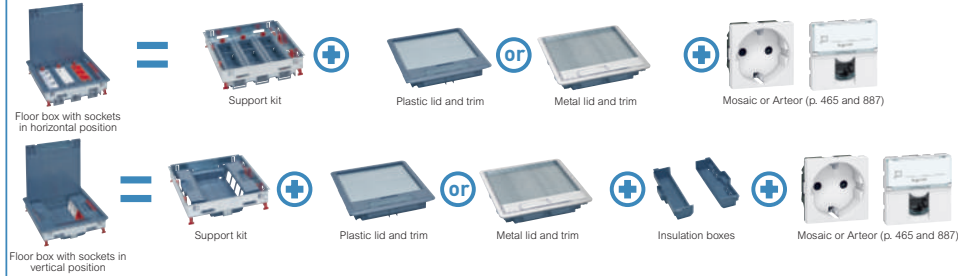


## Standard version floor boxes for raised floor

selection chart













SOCKET MOUNTING POSITION	CAPACITY	FLOOR BOX SUPPORT KITS	LIDS & TRIMS FLOORING THICKNESS ≤ 8 mm		FINISHING PLATES (optional)		INSULATION BOXES			
										
 Hmin: 80 mm	12 (3 x 4) modules	0 880 20	Plastic	0 880 00	Stainless steel	0 880 15	-			
			Metal	Stainless steel	0 880 03	Stainless steel		0 880 45		
				Brass	0 880 06	Brass		0 880 48		
	18 (3 x 6) modules	0 880 21	Plastic	0 880 01	Stainless steel	0 880 16		-		
			Metal	Stainless steel	0 880 04	Stainless steel			0 880 46	
				Brass	0 880 07	Brass			0 880 49	
	24 (3 x 8) modules	0 880 22	Plastic	0 880 02	Stainless steel	0 880 17			-	
			Metal	Stainless steel	0 880 05	Stainless steel				0 880 47
				Brass	0 880 08	Brass				0 880 50
 Hmin: 83 mm	8 (2 x 4) modules	0 880 23	Plastic	0 880 00	Stainless steel	0 880 15	0 880 26			
			Metal	Stainless steel	0 880 03	Stainless steel				0 880 45
				Brass	0 880 06	Brass				0 880 48
	12 (2 x 6) modules	0 880 24	Plastic	0 880 01	Stainless steel	0 880 16	0 880 27			
			Metal	Stainless steel	0 880 04	Stainless steel		0 880 46		
				Brass	0 880 07	Brass		0 880 49		
	16 (2 x 8) modules	0 880 25	Plastic	0 880 02	Stainless steel	0 880 17	0 880 28			
			Metal	Stainless steel	0 880 05	Stainless steel		0 880 47		
				Brass	0 880 08	Brass		0 880 50		
	For lid and trim with 8/12 modules	0 880 39	Plastic	0 880 00	Stainless steel	0 880 15	-			
			Metal	Stainless steel	0 880 03	Stainless steel		0 880 45		
				Brass	0 880 06	Brass		0 880 48		
	For lid and trim with 12/18 modules	0 880 40	Plastic	0 880 01	Stainless steel	0 880 16		-		
			Metal	Stainless steel	0 880 04	Stainless steel			0 880 46	
				Brass	0 880 07	Brass			0 880 49	
	For lid and trim with 16/24 modules	0 880 41	Plastic	0 880 02	Stainless steel	0 880 17		-		
			Metal	Stainless steel	0 880 05	Stainless steel			0 880 47	
				Brass	0 880 08	Brass			0 880 50	

### MOUNTING PRINCIPLE




## Standard version floor boxes for concrete floor

selection chart

SOCKET MOUNTING POSITION	CAPACITY	FLOOR BOX SUPPORT KITS	BACKBOXES		LIDS & TRIMS FLOORING THICKNESS ≤ 8 mm		FINISHING PLATES (OPTIONAL)		
			AUTO-ADJUSTING BACKBOX FOR SCREED HEIGHT 65 TO 90 mm	UNIVERSAL ADJUSTABLE BACKBOX FOR SCREED HEIGHT 55 TO 150 mm					
 Hmin: 80 mm	12 (3 x 4) modules	0 880 20			Plastic	0 880 00	Stainless steel	0 880 15	
					Metal	Stainless steel	0 880 03	Stainless steel	0 880 45
						Brass	0 880 06	Brass	0 880 48
	18 (3 x 6) modules	0 880 21			Plastic	0 880 01	Stainless steel	0 880 16	
					Metal	Stainless steel	0 880 04	Stainless steel	0 880 46
						Brass	0 880 07	Brass	0 880 49
	24 (3 x 8) modules	0 880 22			Plastic	0 880 02	Stainless steel	0 880 17	
					Metal	Stainless steel	0 880 05	Stainless steel	0 880 47
						Brass	0 880 08	Brass	0 880 50
 Hmin: 68 mm	8 (2 x 4) modules	0 880 23	0 880 90	OR 0 880 80 + 0 880 81	Plastic	0 880 00	Stainless steel	0 880 15	
					Metal	Stainless steel	0 880 03	Stainless steel	0 880 45
						Brass	0 880 06	Brass	0 880 48
	12 (2 x 6) modules	0 880 24	0 880 91	OR 0 880 80 + 0 880 82	Plastic	0 880 01	Stainless steel	0 880 16	
					Metal	Stainless steel	0 880 04	Stainless steel	0 880 46
						Brass	0 880 07	Brass	0 880 49
	16 (2 x 8) modules	0 880 25	0 880 92	OR 0 880 80 + 0 880 83	Plastic	0 880 02	Stainless steel	0 880 17	
					Metal	Stainless steel	0 880 05	Stainless steel	0 880 47
						Brass	0 880 08	Brass	0 880 50
	For lid and trim with 8/12 modules	0 880 39	0 880 90	OR 0 880 80 + 0 880 81	Plastic	0 880 00	Stainless steel	0 880 15	
					Metal	Stainless steel	0 880 03	Stainless steel	0 880 45
						Brass	0 880 06	Brass	0 880 48
	For lid and trim with 12/18 modules	0 880 40	0 880 91	OR 0 880 80 + 0 880 82	Plastic	0 880 01	Stainless steel	0 880 16	
					Metal	Stainless steel	0 880 04	Stainless steel	0 880 46
						Brass	0 880 07	Brass	0 880 49
	For lid and trim with 16/24 modules	0 880 41	0 880 92	OR 0 880 80 + 0 880 83	Plastic	0 880 02	Stainless steel	0 880 17	
					Metal	Stainless steel	0 880 05	Stainless steel	0 880 47
						Brass	0 880 08	Brass	0 880 50

### MOUNTING PRINCIPLE

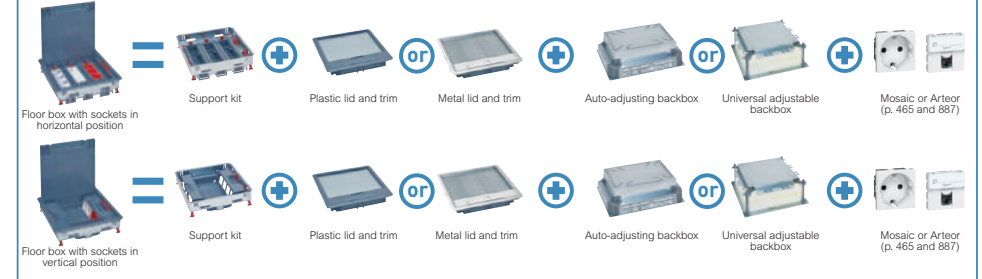

1: Not possible to use straight plugs

## Flush version floor boxes for raised floor

selection chart

SOCKET MOUNTING POSITION	CAPACITY	FLOOR BOX SUPPORT KITS	LID FLOORING THICKNESS ≤ 15 MM		FINISHING PLATES (OPTIONAL)		INSULATION BOXES	
				Metal lid Cat.No 0 881 05 + kit Cat.No 0 881 41		0 880 47		0 880 27
<b>Adjustable horizontal</b>  Hmin: 92 mm	12 (3 x 4) modules	0 881 20	Stainless steel	0 881 03	Stainless steel	0 881 45	-	-
			Brass	0 881 06	Brass	0 881 48		
	18 (3 x 6) modules	0 881 21	Stainless steel	0 881 04	Stainless steel	0 881 46		
			Brass	0 881 07	Brass	0 881 49		
	24 (3 x 8) modules	0 881 22	Stainless steel	0 881 05	Stainless steel	0 881 47		
			Brass	0 881 08	Brass	0 881 50		
<b>Vertical</b>  Hmin: 92 mm	8 (2 x 4) modules	0 881 23	Stainless steel	0 881 03	Stainless steel	0 881 45	0 880 26	
			Brass	0 881 06	Brass	0 881 48		
	12 (2 x 6) modules	0 881 24	Stainless steel	0 881 04	Stainless steel	0 881 46	0 880 27	
			Brass	0 881 07	Brass	0 881 49		
	16 (2 x 8) modules	0 881 25	Stainless steel	0 881 05	Stainless steel	0 881 47	0 880 28	
			Brass	0 881 08	Brass	0 881 50		
<b>Access covers</b> 	For lid 8/12 modules	0 881 39	Stainless steel	0 881 03	Stainless steel	0 881 45	-	
			Brass	0 881 06	Brass	0 881 48		
	For lid 12/18 modules	0 881 40	Stainless steel	0 881 04	Stainless steel	0 881 46		
			Brass	0 881 07	Brass	0 881 49		
	For lid 16/24 modules	0 881 41	Stainless steel	0 881 05	Stainless steel	0 881 47		
			Brass	0 881 08	Brass	0 881 50		








**MOUNTING PRINCIPLE**

 =  +  +  (p. 465 and 887)

 =  +  +  +  (p. 465 and 887)







## Flush version floor boxes for concrete floor







selection chart

SOCKET MOUNTING POSITION	CAPACITY	FLOOR BOX SUPPORT KIT	BACKBOXES		LID FLOORING THICKNESS ≤ 15 MM		FINISHING PLATE (OPTIONAL)	
			AUTO-ADJUSTING BACKBOX FOR SCREED HEIGHT 65 TO 90 MM 	UNIVERSAL ADJUSTABLE BACKBOX FOR SCREED HEIGHT 55 TO 150 MM 		Metal lid Cat.No 0 881 05 + kit Cat.No 0 881 41		0 880 47
<b>Adjustable horizontal</b>  Hmin: 92 mm	12 (3 x 4) modules	0 881 20	0 880 90 <sup>(1)</sup> screed height + coating ≥ 92 mm	0 880 80 + 0 880 81 screed height ≥ 100 mm	Stainless steel	0 881 03	Stainless steel	0 881 45
			Brass	0 881 06	Brass	0 881 48		
	18 (3 x 6) modules	0 881 21	0 880 90 <sup>(1)</sup> screed height + coating ≥ 92 mm	0 880 80 + 0 880 82 screed height ≥ 100 mm	Stainless steel	0 881 04	Stainless steel	0 881 46
			Brass	0 881 07	Brass	0 881 49		
<b>Vertical</b>  Hmin: 80 mm	8 (2 x 4) modules	0 881 23	0 880 90	OR 0 880 80 + 0 880 81	Stainless steel	0 881 03	Stainless steel	0 881 45
			Brass	0 881 06	Brass	0 881 48		
	12 (2 x 6) modules	0 881 24	0 880 91	OR 0 880 80 + 0 880 82	Stainless steel	0 881 04	Stainless steel	0 881 46
			Brass	0 881 07	Brass	0 881 49		
16 (2 x 8) modules	0 881 25	0 880 92	OR 0 880 80 + 0 880 83	Stainless steel	0 881 05	Stainless steel	0 881 47	
		Brass	0 881 08	Brass	0 881 50			
<b>Access cover</b> 	For lid 8/12 modules	0 881 39	0 880 90	OR 0 880 80 + 0 880 81	Stainless steel	0 881 03	Stainless steel	0 881 45
			Brass	0 881 06	Brass	0 881 48		
	For lid 12/18 modules	0 881 40	0 880 91	OR 0 880 80 + 0 880 82	Stainless steel	0 881 04	Stainless steel	0 881 46
			Brass	0 881 07	Brass	0 881 49		
	For lid 16/24 modules	0 881 41	0 880 92	OR 0 880 80 + 0 880 83	Stainless steel	0 881 05	Stainless steel	0 881 47
			Brass	0 881 08	Brass	0 881 50		

**MOUNTING PRINCIPLE**

 =  +  +  OR  +  (p. 465 and 887)

 =  +  +  OR  +  (p. 465 and 887)

1: Not possible to use straight plugs