





Multi-outlet towers with cord

German standard



16 A/230 V - 3500 W
 With main ON/OFF switch
 Integrated voltage surge protector: protects TV, hi-fi equipment, DVD players, computers etc against lightning strikes and prevents the destruction of expensive equipment
 $U_c = 250 \text{ V}$, $U_{oc} = 4 \text{ kV}$ and $U_p = 1 \text{ kV}$
 Indicator signalling the voltage surge protector status

Pack	Cat.Nos	Multi-outlet induction tower
5	 Alu/Black 6 946 30	4 x 2P+E + one induction charging station and two 2.4 A USB charging modules 1 A induction station using Qi technology (contact) Position and charging status confirmation LED 2 USB inputs for recharging mobile terminals Current = 2.4 A in total 2 m power supply cord (3G, 1.5 mm ²)
1	 6 946 14  6 946 19	Multi-outlet towers with USB chargers 4 x 2P+E + one base with two 2.4 A USB charging modules + one micro-USB plug 2 USB inputs for recharging mobile terminals Current = 2.4 A in total Micro-USB plug for recharging smartphones directly on the base 2 m power supply cord (3G, 1 mm ²)
1	 Alu/Black 6 946 25	Multi-outlet tower with Wi-Fi access point and repeater 4 x 2P+E + 2 x RJ 45 Wi-Fi terminal Wi-Fi technology 2.4 GHz - IEEE 802.11b/g/n Wi-Fi terminal: receives and repeats the signal Wi-Fi transmitted and amplified by the router 1 RJ 45 input for receiving the Internet via a cable and becoming a Wi-Fi access point 2 m power supply cord (3G, 1 mm ²)

INDUCTION SOLUTIONS



Total flexibility Charge without a cord!



Whether for professional or private use, Legrand's chargers can be integrated anywhere to recharge smartphones equipped with a Qi induction charging receiver!



Qi WIRELESS CHARGER ONE-GANG STATION WALL SOCKET + TYPE-A USB PORT

User-friendly solution to be installed in any room on a socket, a column module, a multi-outlet extension...
 > Exists in Arteor, Valena, Niloé and Mosaic finishes.



Qi Qi WIRELESS CHARGER STATION INTEGRATED IN FURNITURE

Easily equip any meeting room table, countertop, waiting room furniture...
 > See p. 886



Qi WIRELESS CHARGER FLUSH-MOUNTED RUGGED STATION

Optimal solution for public areas, waiting rooms, cloakrooms, hotels...
 > See p. 886

Qi WIRELESS CHARGER MULTI-OUTLET EXTENSION

Ideal solution for an office, a small meeting room, an individual working space...
 > See opposite



Connected multi-outlet extension with cord - German standard



Pack Cat.Nos Connected multi outlet extension

Pack	Cat.Nos	Connected multi outlet extension
5	6 946 90	<p>Black</p> <p>16 A / 250 V - 3680 W 1.5 m cord</p> <p>Functions per socket or per group of sockets:</p> <ul style="list-style-type: none"> - alerts (by email or push notification) in the event of a power cut or when a given level of consumption is reached - measure of power consumption (available for consultation on your smartphone) - remote on/off switching with smartphone, with the possibility to make scenarios via the application <p>Linked to internet provider box through Wi-Fi: fast configuration with smartphone</p> <p>Application to be downloaded via the QR-code printed on the packaging or Apple Store and Play Store</p>

Multi-outlet extensions with cord

German standard



6 950 10



6 946 04

To connect several devices equipped with plugs with or without earth: appliances class I (simple insulation) or class II (double insulation), lamps, PC, TV, stereo, etc.
Extra-flat (only 30 mm thick): can be slid underneath furniture

Pack Cat.Nos Multi-outlet extensions - unswitched

Pack	Cat.Nos	Multi-outlet extensions - unswitched
		<p>Wall-mounting possibilities with the packaging accessory</p> <p>90° socket for connecting a transformer without blocking another socket</p> <p>Power supply cord 1.5 m (3G 1.5 mm²) or 3 m (3G 1.5 mm²) or 5 m (3G 1.5 mm²)</p> <p>16 A max. power 3 500 W at 230 V</p>
		1.5 m cord
10	6 950 01 6 950 10	3 x 2P+⊥
10	6 950 06 6 950 25	4 x 2P+⊥
10	6 950 11	5 x 2P+⊥
10	6 950 16	6 x 2P+⊥
		3 m cord
10	6 950 02 6 950 15	3 x 2P+⊥
10	6 950 07 6 950 28	4 x 2P+⊥
10	6 950 12	5 x 2P+⊥
10	6 950 17	6 x 2P+⊥
		5 m cord
10	6 950 03 6 950 20	3 x 2P+⊥
10	6 950 08 6 950 30	4 x 2P+⊥
10	6 950 13	5 x 2P+⊥
10	6 950 18	6 x 2P+⊥

Pack Cat.Nos Multi-outlet extensions - switched


Pack	Cat.Nos	Multi-outlet extensions - switched
		<p>On/off switch with a light indicator, can be operated by foot or by hand</p> <p>Socket with child protection shutters tested to withstand 10000 operations</p> <p>Orientable socket outlets</p> <p>Maximum space between 2 sockets to connect transfos, chargers, etc.</p> <p>Supplied with self-gripping tie for grouping the cords of the connected devices</p> <p>Direct wall-mounting possibilities (with screws)</p> <p>Cable management possible around the wall-mounting fixtures</p> <p>With power supply cord 1.5 m (3G 1.5 mm²) or 3 m (3G 1.5 mm²)</p> <p>16 A max. - Power 3500 W at 230 V</p>
		1.5 m cord
5	6 946 21 6 946 01	3 x 2P+⊥
5	6 946 26 6 946 04	4 x 2P+⊥
5	6 946 31 6 946 07	5 x 2P+⊥
5	6 946 36 6 946 09	6 x 2P+⊥
		3 m cord
5	6 946 22 6 946 02	3 x 2P+⊥
5	6 946 27 6 946 05	4 x 2P+⊥
5	6 946 32	5 x 2P+⊥
5	6 946 37	6 x 2P+⊥



Products to be submitted to local tests to ensure a perfect functioning
Please contact your local agency



Multi-outlet extensions with cord

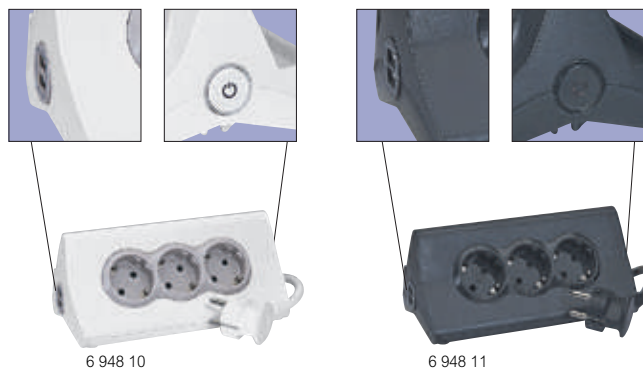German standard (continued)



To connect several devices equipped with plugs with or without earth: appliances class I (simple insulation) or class II (double insulation), lamps, PC, TV, stereo, etc.

Extra-flat (only 30 mm thick): can be slid underneath furniture
Integrated cable compartment

Pack	Cat.Nos	
10	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  White/Grey 6 948 10 </div> <div style="text-align: center;">  Black 6 948 11 </div> </div>	Multi-outlet extensions with tablet support - switched 1.5 m cord 3 x 2P+⊥ + 2 USB Type-A Equipped with a 16 A circuit breaker

Multifunction multi-outlet extensions with cord

German standard



6 946 13



6 946 15

Pack	Cat.Nos		Multi-outlet extensions for comfort and safety
			<p>On/off switch with a light indicator, can be operated by foot or by hand Orientable socket outlets Sockets with child protection shutters tested to withstand 10000 operations Maximum space between 2 sockets to connect transfos, chargers, etc. Direct wall-mounting possibilities (with screws) With power supply cord (3G 1.5 mm²) Possibility to manage the cable around the feet Supplied with self-gripping tie for grouping the cords of the connected devices Important: Multi-outlet extensions should always be installed together with modular voltage surge protectors at the main board</p> <p>With power consumed indicator (safe control) Equipped with: - an indicator showing the power consumed by the connected devices (max. 3500 W) - safety circuit-breaker that automatically shuts down the power if maximum power is exceeded With manual reset</p> <p>With voltage surge protector For protection of electrical and electronic devices (TV, stereo, PC, etc.) against lightning and overvoltages With an indicator showing the protection status (On: devices protected, Off: voltage surge protection inactive, need to replace the extension)</p>
5	6 946 41		4 x 2P + \perp - 1.5 m cord
5		6 946 43	4 x 2P + \perp - 3 m cord
5	6 946 46		6 x 2P + \perp - 1.5 m cord
5		6 946 47	6 x 2P + \perp - 3 m cord
5	6 946 51	6 946 11	4 x 2P + \perp - 1.5 m cord
5	6 946 56	6 946 12	6 x 2P + \perp - 1.5 m cord

Pack	Cat.Nos		Multi-outlet extensions for comfort and safety (continued)
			<p>With master/slave function for automatic ON/OFF Equipped with: - 1 master socket - 4 slave sockets - 1 uncontrolled socket - voltage surge protector with thermic protection</p> <p>6 x 2P + \perp - 1.5 m cord Plug your TV in the master socket Plug your DVD player, console game, loudspeakers, amplifiers, etc. in the slave sockets When you turn on the TV, all the slave sockets get power and turn on the plugged devices When you turn off the TV (info standby mode or completely off), the multi-outlet extension switches off the power of the slave sockets The uncontrolled socket can be used continuously (for alarm clock, ADSL box, etc.)</p> <p>With USB chargers 2.4 A Used for recharging smartphones and tablets on a fast charge Current = 2.4 A in total</p>
5	6 946 48	6 946 13	
5	6 946 15	6 946 16	4 x 2P+E = 2 USB - 1.5 m cord
5	6 946 17	6 946 18	6 x 2P+E + 2 USB - 1.5 m cord

Multi-outlet extensions without cord

German standard



6 946 29



7 824 97 + 2 x RJ 45 sockets Cat.No 7 824 24 (p. 543)




6 950 09

Pack	Cat.Nos		Multi-outlet extensions for comfort
			<p>Sockets with child protection shutters tested to withstand 10000 operations</p> <p>Orientable socket outlets</p> <p>To be equipped with flexible cable of 3G 1.5 mm² or 3G 1mm² minimum</p> <p>On/off switch with a light indicator, can be operated by foot or by hand</p> <p>Maximum space between 2 sockets to connect transformers, chargers, etc.</p> <p>Direct wall-mounting possibilities (with screws)</p> <p>Possibility to manage the cable around the feet</p> <p>Supplied with self-gripping tie for grouping the cords of the connected devices</p> <p>16 A max. power 3500 W at 230 V</p>
	White/Grey	Black	
5	6 946 24	6 946 03	3 x 2P+⊥
5	6 946 29	6 946 06	4 x 2P+⊥
5	6 946 34	6 946 08	5 x 2P+⊥
5	6 946 39	6 946 10	6 x 2P+⊥

Pack	Cat.Nos		Standard extensions for comfort
			<p>To connect several devices equipped with plugs with or without earth: appliances class I (simple insulation) or class II (double insulation), lamps, PC, TV, stereo, etc.</p> <p>Ultra-flat: can be slid underneath furniture</p> <p>Wall-mounting possibilities with the packaging accessory</p> <p>90° socket for connecting a transformer without blocking another socket</p> <p>16 A max. power 3500 W at 230 V</p> <p>To be equipped with flexible cable of 3G 1.5 mm² or 3G 1mm² minimum</p>
	White/Grey	Black	
10	6 950 04	6 950 23	3 x 2P+⊥
10	6 950 09	6 950 33	4 x 2P+⊥
10	6 950 14	6 950 38	5 x 2P+⊥
10	6 950 19	6 950 45	6 x 2P+⊥

Pack	Cat.Nos	Equipped workstation
2	7 824 97	<p>Equipped with:</p> <ul style="list-style-type: none"> - 4 x 2P+E German standard socket outlets with shutters - 2 blanking plates for integration of Forix mechanisms



Fluorescent inspection lamps

German standard



0 622 41

Conform to EN 61 242 A 11
3000 W - 230 V~ (cable entirely unrolled) with thermal swith protection (manually resettable)

Pack	Cat.Nos	Fluorescent inspection lamps
		IP 64 - IK 09
		Supplied with fluorescent tube
		Class II
		5 m cable
		H05 RNF (2 x 1 mm ²)
1	0 622 40	8 W - 230 V - with 2P - 10/16 A plug
1	0 622 41	G5 lampholder
		11 W - 230 V - with 2P - 10/16 A plug
		IP 55
		With hook - Rubber handle supplied with fluorescent tube, 2G7 lampholder
1	0 622 32	11 W - 230 V with 2P plug - 16 A
		10 m cable - Class II
1	0 622 33	11 W - 24 V with Hypra plug
		10 m cable - Class III

Desktop multi-outlet extensions



6 535 60



0 546 99



6 535 63

Pack	Cat.Nos	Ready to use multi-outlet extensions
1	6 535 60	Aluminium body Conform to IEC 60-884-1 16 A - 250 VA with shutters Supplied with 3 m cord Composed of: - 4 x 2P+E sockets - 1 x illuminated switch
1	6 535 61	Composed of: - 6 x 2P+E sockets - 1 x illuminated switch
1	6 535 62	Composed of: - 3 x 2P+E sockets - 1 x double USB charger
1	6 535 63	Composed of: - 2 x 2P+E sockets - 2 x 2P+E tamperproof sockets - 2 x RJ 45 Cat.6 UTP 1 module

Empty multi-outlet extensions

1	0 546 90	Aluminium body To be equipped with Arteor or Mosaic Programme wiring accessories 8 modules
1	0 546 91	12 modules
1	0 546 92	16 modules

Fixing accessory for desktop multi-outlet extensions

1	0 546 99	For fixing the desktop multi-outlet extensions on the office furniture
---	----------	--

Cable worm

1	0 535 98	2 compartments Length: 0.75 m White colour Very suitable solution for a safe and design protection of the cabling between desk and floor
---	----------	---

Meeting room multi-outlet extensions with cord



6 535 75



6 535 77

Pack	Cat.Nos	For meeting rooms with central table
1	6 535 74	Equipped with 8 x 2P+E sockets with 45° sloping screw recesses for easy insertion of angled plug On/off switch with light indicator 3680 W at 230 V~ Equipped with 5 m cord (HO5VVF 3G 1.5 mm²) with 2P+E plug Supplied with carrying case High current For connecting up to 8 devices Composition: - 8 x 2P+E with 45° sloping screw recesses
1	6 535 75	With non manageable switch For connecting up to 8 devices and networking up to 6 peripherals (computers...) Requires the use of Ethernet 10/100 base T network cards on the peripherals for 10/100 Mbps data exchanges Composition: - 8 x 2P+E sockets - 1 10/100 base T non manageable switch 6 ports Network cable not supplied
1	6 535 77	With non manageable switch and HD 15 + jack socket For connecting up to 7 devices and networking up to 6 peripherals (computers...) One connection point with HD 15 connector and a 3.5 mm jack Requires the use of Ethernet 10/100 base T network cards on the peripherals for 10/100 Mbps data exchanges Composition: - 7 x 2P+E sockets - 1 10/100 base T non manageable switch with 6 ports - 1 HD 15 socket + 3.5 mm jack - 1 female VGA cord, length 1 m. To be used with a VGA extension - 1 female jack 3.5 mm cord, length 1 m Network cable not supplied

Pop-up type flush-mounting boxes for concrete or raised access floors



Technical characteristics **see e-catalogue**

Can be installed in concrete or raised access floors
Conform to IEC 60670-23, IEC 60884-1 and NFC 61-314

Pack	Cat.Nos	Pop-up boxes to be equipped
		Slim design for perfect integration into the floor Soft opening for enhanced comfort and safety Equipped with "push and slide" locking system to avoid accidental opening by feet To be equipped with Mosaic or Arteur socket outlets For installation use the flush-mounting boxes for concrete floors or the kits for raised access floors
		3 modules
1	0 540 10	● Matt Aluminium finish
1	0 540 15	● Brushed Brass
1	0 540 20	● Brushed Stainless Steel finish
		6 (2 x 3) modules
1	0 540 12	● Matt Aluminium finish
1	0 540 17	● Brushed Brass
1	0 540 22	● Brushed Stainless Steel finish
		4 modules
1	0 540 11	● Matt Aluminium finish
1	0 540 16	● Brushed Brass
1	0 540 21	● Brushed Stainless Steel finish
		8 (2 x 4) modules
1	0 540 13	● Matt Aluminium finish
1	0 540 18	● Brushed Brass
1	0 540 23	● Brushed Stainless Steel finish

Pack	Cat.Nos	Installation kits for raised access floors
		Include an empty receptacle and fixing brackets for raised access floor tiles or table tops Equipped with cable retainer for power cables, to ensure increased safety of the installation Compatible with: - Cat. 6 data cabling - audio/video cabling
1	0 540 05	3 modules
1	0 540 07	6 (2 x 3) modules
1	0 540 06	4 modules
1	0 540 08	8 (2 x 4) modules

Pack	Cat.Nos	Flush-mounting boxes for installation in concrete floors
		For installation of pop-up floor boxes in concrete floors Equipped with knockouts for Ø20 and Ø25 mm conduits
		Metal flush-mounting boxes
1	0 540 00	3 modules
1	0 540 02	6 (2 x 3) modules
1	0 540 01	4 modules
1	0 540 03	8 (2 x 4) modules
		Plastic flush-mounting boxes
1	6 503 90	3 modules
10	6 503 31	6 modules